

EDS-205A/208A Series

5 and 8-port unmanaged Ethernet switches



- > 10/100BaseT(X) (RJ45 connector), 100BaseFX (multi/single-mode, SC or ST connector)
- > Redundant dual 12/24/48 VDC, 18 to 30 VAC power inputs
- > IP30 aluminum housing
- > Rugged hardware design well suited for hazardous locations (Class I Div. 2 /ATEX) and maritime environments (DNV/GL)
- > -40 to 75°C operating temperature range (T models)

The certification logos shown here apply to some or all of the products in this section. For details, see "Regulatory Approvals" under "Specifications" below.



Introduction

The EDS-205A/208A series are 5 and 8-port industrial Ethernet switches that support IEEE 802.3 and IEEE 802.3u/x with 10/100M full/half-duplex, MDI/MDI-X auto-sensing. The EDS-205A/208A switches provide 12/24/48 VDC (9.6 to 60 VDC), 18 to 30 VAC redundant power inputs that can be connected simultaneously to live AC/DC power sources. These switches have been designed for harsh industrial environments, such as in maritime (DNV/GL) or hazardous locations (Class I Div. 2/ATEX) that comply with FCC, TUV, UL, and CE standards.

The EDS-205A/208A switches are available with a standard operating temperature range from -10 to 60°C, or with a wide operating temperature range from -40 to 75°C. All models are subjected to a 100% burn-in test to ensure that they fulfill the special needs of industrial automation control applications. In addition, the EDS-205A/208A switches have DIP switches for enabling or disabling broadcast storm protection, providing another level of flexibility for industrial applications.

Specifications

Technology

Standards:

IEEE 802.3 for 10BaseT
 IEEE 802.3u for 100BaseT(X) and 100BaseFX
 IEEE 802.3x for Flow Control

Processing Type: Store and Forward

Flow Control: IEEE 802.3x flow control, back pressure flow control

Interface

Fiber Ports: 100BaseFX ports (SC/ST connector, multi-mode, single-mode)

RJ45 Ports: 10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection

DIP Switches: Enable/Disable broadcast storm protection

LED Indicators: Power, 10/100M (TP port), 100M (fiber port)

Optical Fiber

	100BaseFX	
	Multi-mode	Single-mode
Wavelength	1300 nm	1310 nm
Max. TX	-10 dBm	0 dBm
Min. TX	-20 dBm	-5 dBm
RX Sensitivity	-32 dBm	-34 dBm
Link Budget	12 dB	29 dB
Typical Distance	5 km ^a 4 km ^b	40 km ^c
Saturation	-6 dBm	-3 dBm

a. 50/125 μm, 800 MHz*km fiber optic cable
 b. 62.5/125 μm, 500 MHz*km fiber optic cable
 c. 9/125 μm single-mode fiber optic cable

Power Requirements

Input Voltage: 12/24/48 VDC (9.6 to 60 VDC), 18 to 30 VAC (47 to 63 Hz), redundant dual inputs

Input Current:

EDS-205A: 0.091 A @ 24 V
 EDS-208A: 0.13 A @ 24 V
 EDS-208A-M: 0.17 A @ 24 V
 EDS-208A-MM/SS: 0.22 A @ 24 V

Overload Current Protection: 1.1 A

Connection: 1 removable 4-contact terminal block

Reverse Polarity Protection: Present

Physical Characteristics

Housing: Aluminum, IP30 protection

Dimensions:

EDS-205A: 30 x 115 x 70 mm (1.18 x 4.52 x 2.76 in)
 EDS-208A: 50 x 115 x 70 mm (1.96 x 4.52 x 2.76 in)

Weight:

EDS-205A: 175 g
 EDS-208A: 275 g

Installation: DIN-Rail mounting, wall mounting (with optional kit)

Environmental Limits

Operating Temperature:

Standard Models: -10 to 60°C (14 to 140°F)
 Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals

Safety: UL508

Hazardous Location: UL/cUL Class I, Division 2, Groups A, B, C and D (Pending); ATEX Class I, Zone 2, Ex nC IIC (Pending)

EMI: FCC Part 15, CISPR (EN55022) class A

EMS:

EN61000-4-2 (ESD), level 3

EN61000-4-3 (RS), level 3

EN61000-4-4 (EFT), level 3

EN61000-4-5 (Surge), level 3

EN61000-4-6 (CS), level 3

EN61000-4-8

EN61000-4-11

Maritime: DNV (Pending), GL (Pending)

Shock: IEC 60068-2-27

Freefall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Note: Please check Moxa's website for the most up-to-date certification status.

MTBF (mean time between failures)

Time: 425,000 hrs


Database: Telcordia (Bellcore), GB

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions (unit = mm)

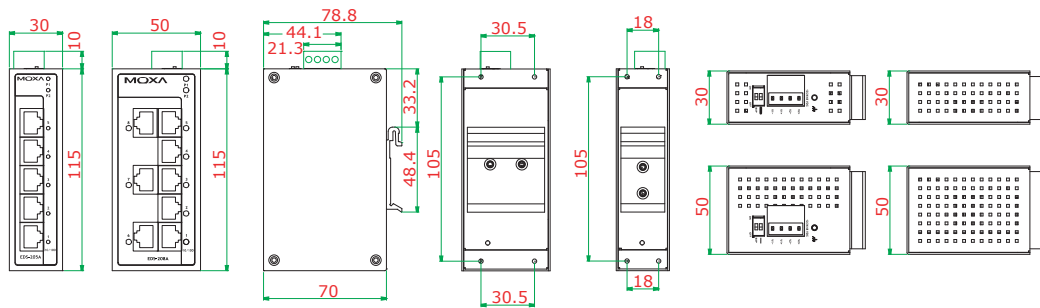

Front Views

Side View

Rear Views

Top & Bottom Views

Ordering Information

Available Models		Port Interface			
Standard Temperature (-10 to 60°C)	Wide Temperature (-40 to 75°C)	10/100BaseT(X)	100BaseFX		
			Multi-mode, SC Connector	Multi-mode, ST Connector	Single-mode, SC Connector
EDS-205A	EDS-205A-T	5	---	---	---
EDS-208A	EDS-208A-T	8	---	---	---
EDS-208A-M-SC	EDS-208A-M-SC-T	7	1	---	---
EDS-208A-M-ST	EDS-208A-M-ST-T	7	---	1	---
EDS-208A-MM-SC	EDS-208A-MM-SC-T	6	2	---	---
EDS-208A-MM-ST	EDS-208A-MM-ST-T	6	---	2	---
EDS-208A-S-SC	EDS-208A-S-SC-T	7	---	---	1
EDS-208A-SS-SC	EDS-208A-SS-SC-T	6	---	---	2

Optional Accessories (can be purchased separately)

DR-4524/75-24/120-24: 45/75/120 W DIN-Rail 24 VDC power supplies

MDR-40-24/60-24: 40/60 W DIN-Rail 24 VDC power supplies, -20 to 70°C operating temperature

WK-46: Wall mounting kit (EDS-208A series only)

WK-30: Wall mounting kit (EDS-205A series only)

RK-4U: 4U-high 19" rack mounting kit