

IMC-P101 Series

IEEE 802.3af PoE Ethernet-to-fiber media converters



- > 10/100BaseT(X) Auto-negotiation and Auto-MDI/MDI-X
- > IEEE 802.3af compliant PoE
- > Power failure by relay output
- > Up to 15.4 W of power to power device (PD)
- > Store-and-Forward mode and Pass Through mode
- > -40 to 75°C operating temperature range (T models)
- > Redundant dual VDC power inputs



Introduction

IMC-P101 series Ethernet-to-fiber media converters provide Ethernet media conversion from 10/100BaseT(X) to 100BaseFX (with SC or ST connectors). The converters are classified as power source equipment (PSE), and when used in this way provide up to 15.4 watts to IEEE 802.3af compliant powered devices (PDs), eliminating

the need for additional wiring. The IMC-P101 converters support IEEE 802.3/802.3u/802.3x with 10/100M, full/half-duplex, and MDI/MDI-X auto-sensing, providing a complete solution for your industrial Ethernet network.

Specifications

Technology

Standards:

IEEE 802.3 for 10BaseT
 IEEE 802.3u for 100BaseT(X), 100BaseFX
 IEEE 802.3af for Power-over-Ethernet

Interface

RJ45 Ports: 10/100BaseT(X)

Fiber Ports: 100BaseFX (SC/ST connectors)

LED Indicators: PWR1, PWR2, Fiber Link, 10/100M (TP port), PSE Indicator

DIP Switches:

| DIP No. | Function | ON | OFF |
|---------|-----------------------------|--------------------|--------------|
| 1 | Auto Negotiation | Enable* | Disable |
| 2 | Force TP Speed | 100 Mbps* | 10 Mbps |
| 3 | Force TP Duplex | Full Duplex* | Half Duplex |
| 4 | Link Fault Pass Through | Enable* | Disable |
| 5 | Operating Mode | Store-and-Forward* | Pass Through |
| 6 | PSE | Disable | Enable* |
| 7 | P.R.R. (PD Remote Reset) | Enable | Disable* |

(*) : Default DIP switch setting.

Alarm Contact: One relay output with current carrying capacity of 1 A @ 24 VDC

Optical Fiber

| | 100BaseFX | |
|------------------|--|--------------------|
| | Multi-mode | Single-mode |
| Wavelength | 1300 nm | 1310 nm |
| Max. TX | -10 dBm | 0 dBm |
| Min. TX | -20 dBm | -5 dBm |
| RX Sensitivity | -32 dBm | -34 dBm |
| Link Budget | 12 dB | 29 dB |
| Typical Distance | 5 km ^a 4 km ^b | 40 km ^c |
| Saturation | -6 dBm | -3 dBm |

a. 50/125 μm, 800 MHz*km fiber optic cable
 b. 62.5/125 μm, 500 MHz*km fiber optic cable
 c. 9/125 μm, 3.5 PS/(nm*km) fiber optic cable

Physical Characteristics

Housing: Metal, IP30 protection

Dimensions: 144.45 x 110.2 x 51.65 mm (5.69 x 4.34 x 2.03 in)

Weight:

Product only: 525 g

Packaged: 710 g

Installation: DIN-Rail mounting, wall mounting (with optional kit)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -40 to 85°C (-40 to 185°F)

Power Requirements


Input Voltage: 48 VDC (46 to 57 VDC), redundant inputs
Power Consumption: 430 mA @ 48 VDC (max.)
Connection: Removable terminal block
Overload Current Protection: 1.6 A (protects against two signals shorted together)
Reverse Polarity Protection: Protects against V+/V- reversal

Regulatory Approvals

Safety: UL 508 (Pending)
EMI: FCC Part 15, CISPR (EN55022) class A
EMS:
 IEC 61000-4-2 Edition 1.2: 2001-04 (Level 4)
 IEC 61000-4-3: 2002+A1: 2002 (Level 3)
 IEC 61000-4-4: 2004 (Level 4)
 IEC 61000-4-5 Edition 1.1: 2001-04 (Level 3)
 IEC 61000-4-6 Edition 2.1: 2004-11 (Level 3)
 IEC 61000-4-8 Edition 1.1: 2001-03 (Level 3)
 IEC 61000-4-11 Second Edition: 2004-03

Freefall: IEC60068-2-32
Shock: IEC60068-2-27
Vibration: IEC60068-2-6
Warranty
Warranty Period: 5 years
Details: See www.moxa.com/warranty

Dimensions

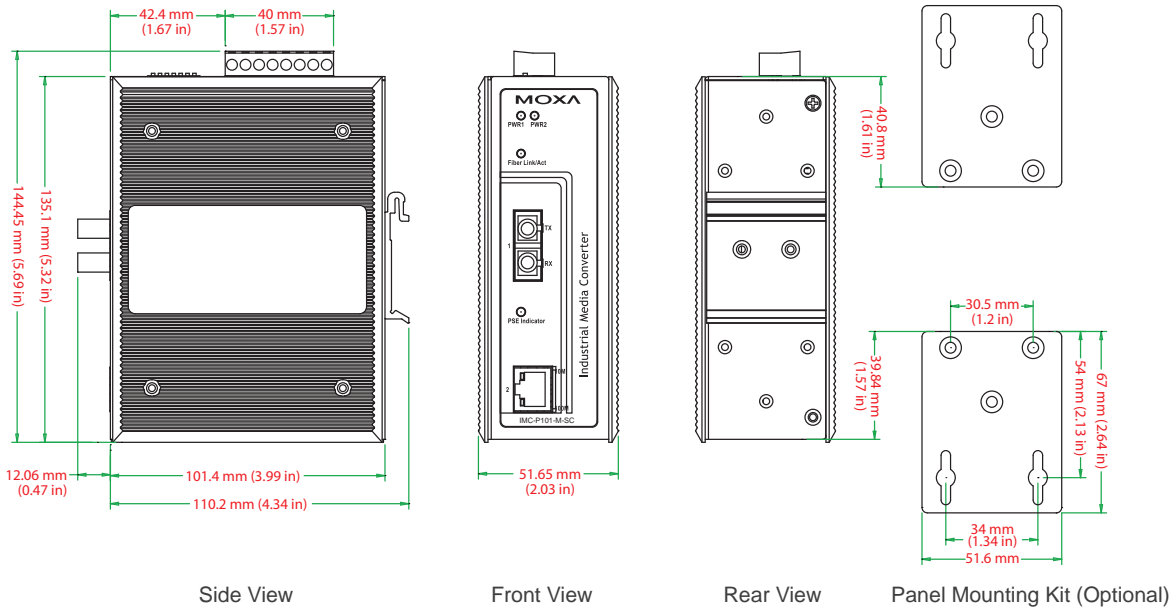

Ordering Information

Available Models

- IMC-P101-M-SC:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, multi-mode port with SC connector, 0 to 60°C operating temperature
- IMC-P101-M-ST:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, multi-mode port with ST connector, 0 to 60°C operating temperature
- IMC-P101-S-SC:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, single-mode port with SC connector, 0 to 60°C operating temperature
- IMC-P101-S-ST:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, single-mode port with ST connector, 0 to 60°C operating temperature
- IMC-P101-M-SC-T:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, multi-mode port with SC connector, -40 to 75°C operating temperature
- IMC-P101-M-ST-T:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, multi-mode port with ST connector, -40 to 75°C operating temperature
- IMC-P101-S-SC-T:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, single-mode port with SC connector, -40 to 75°C operating temperature
- IMC-P101-S-ST-T:** PoE industrial 10/100BaseT(X) to 100BaseFX media converter, single-mode port with ST connector, -40 to 75°C operating temperature